

flipIT[®] monitor mount system



SMARTDESKS[®]

Semi-recessed display system converts to a multi-use desk top.
Excellent ergonomic orientation prevents fatigue and increases productivity.

flipIT® monitor mount system

flipIT Kits® install to make any desktop a multi-use workspace.

Two styles:
With or without keyboard platform.

Two widths:
Permits best fit for desktop space and monitor size desired.

Ideal for any office or meeting space.
The low screen position facilitates communication with unobstructed sight lines.

Works great in conference room studios where cameras are used for teleconferencing. Data screens can now be placed in the personal spaces of participants, or flipped into the table top if not needed.

flipIT® FIH-23
monitor mount system
for VESA compliant displays
up to 23 inch case width



PULL handle releases top latch and actuates opening.

flipIT® FIK-19
monitor mount system with keyboard platform
for VESA compliant displays up to 18.75 inch case width

26 x 8 inch keyboard platform
releases top latch and
actuates opening.



“Multi-use” your workspace!

Display and keyboard disappear when focus is on text media.




Ergonomic display positioning

flipIT® screen angle is adjustable within range of 37° to accommodate neutral head and neck position for a range of human statures.

30° range of optimal line-of-sight angle

Semi-recessed display position is ergonomically ideal:

- Permits unobstructed sight lines
- Ensures neutral neck and head position
- Perfect for those who wear corrective lenses, especially multi-focal lenses.

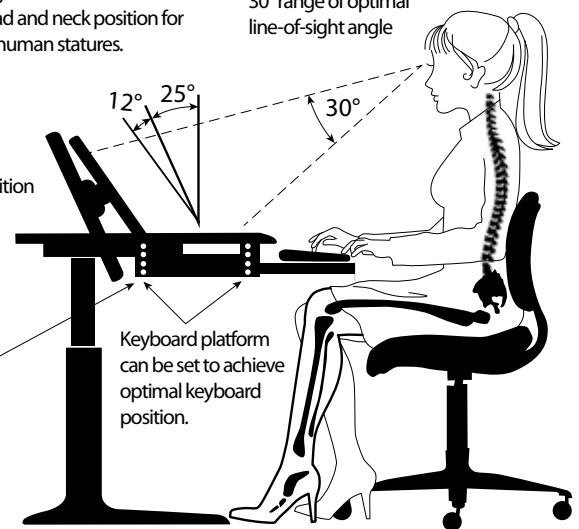

Heavy duty keyboard platform with Genuine Accuride® Bearing Slides: 75 lb. load rating

Keyboard platform can be set to achieve optimal keyboard position.

flipIT Kits® contain everything you need for easy installation.

Each flipIT Kit® has fully illustrated, complete installation directions, including a precise paper template to use for locating the cut-out and drilling pilot holes for keyboard platform and PULL handle latch.

Anyone can install flipIT® into any work surface with this criteria:

- 8 inches required in front of unit cut-out for PULL handle or keyboard platform.
- 2.75" required in back of unit for structural integrity. Monitors usually mount such that they extend below the flipIT® lid. When closed, this allowance is necessary for monitor parking space.
- Minimum width for multi-user installations: 30 inches
- Clearance distance under surface for operation: 8.5 inches
- Clearance distance over table top: 9 inches
- Recommended distance from floor to under side of desktop for keyboard mounting: 29-29.25 inches
- Recommended desktop thickness: 30mm (1.18 inches)
- Recommended desktop height for use with keyboard: 28 inches; with keyboard tray: 30 inches
- Optimal table top widths for single workstations flipIT® 19: 36 inches; flipIT® 23: 44 inches



“Multi-use” your conference room!

flipIT Kits® for collaborative conference spaces

Materials:

- Lids are medium density fiberboard (MDF) finished in black 3 dimensional laminate (3DL).
- Top surface lid color options are black (standard), or may be custom ordered to match your existing desk top.
- All steel construction of flipIT® mechanical
- Pneumatic spring actuated opening
- Accuride® all-steel ball bearing keyboard platform slides
- All finished metal parts are standard in black powdercoat; however, special order RAL color matches can be accommodated on a custom order basis.
- Made in USA

Model Numbers:

- FIK 19 flipIT® 19 with keyboard platform
- FIH 19 flipIT® 19 PULL latch release

- FIK 23 flipIT® 23 with keyboard platform
- FIH 23 flipIT® 23 PULL latch release

SMARTDESKS®

where design meets technologysm

Distributed by: _____